

NICHE 2NS D/ID LED

HOUSING

THE 5" INCH NOMINAL DEEP HSG TO BE FORMED FROM EXTRUDED ALUMINUM 6063T5 (STANDARD) ALL FIXTURES ARE PRE-WIRED. ALL STEEL PARTS ARE PHOSPHATE TREATED FOR CORROSION RESISTANCE BEFORE PAINT PROCEDURE, THEN BAKED WITH SUPERIOR ADHESION FOR DURABILITY.

LED MODULES

HIGHER EFFICACY UP TO 170 LPW WITH SERVICE LIFE GREATER THAN 60000(L70) HIGH COLOR RENDER AND EXCELLENT COLOR CONSISTENCY COLOR OPTIONS AVAILABLE FROM 27K TO 40K . 90 CRI LEDS AVAILABLE AS OPTIONAL

DRIVERS

CONSTANT CURRENT, CLASS 2
UNIVERSAL INPUT : 120-277VAC
SOUND RATED A, 54V OUTPUT 0-10V
DIMMING STANDARD .
DALI, ECOSYSTEM AND DMX DRIVERS ALSO AVAILABLE

REFLECTOR


TO BE FORMED FROM 20-24GA ALUMINUM
FINISH: BAKED WHITE ENAMEL WITH
90% REFLECTIVITY

MOUNTING

CABLE, PENDANT OR WALL
MOUNT

PRODUCT DESCRIPTION

THE 2NS D/ID LED INSURES LONG CONTINUOUS UNINTERRUPTED ROWS OF FIXTURES WHILE KEEPING HOUSING DIFFUSION ACCURATE. THE ADVANCED DESIGN OF THE LED 2NS OFFERS HIGH EFFICIENCY AND A MINIMUM OF 60,000 HOURS OF LAMP LIFE, EXCELLENT COLOR AND CONTINUOUS UNINTERRUPTED DIRECT LIGHT. THE INDIRECT LIGHTING PROVIDES A WIDE, BROAD EVEN SWATH OF ILLUMINATION. PENDANT AND WALL MOUNTED FIXTURES ARE AVAILABLE. SNAP ON EXTRUDED FROSTED DIFFUSERS CREATE SOFT, EVEN LIGHT

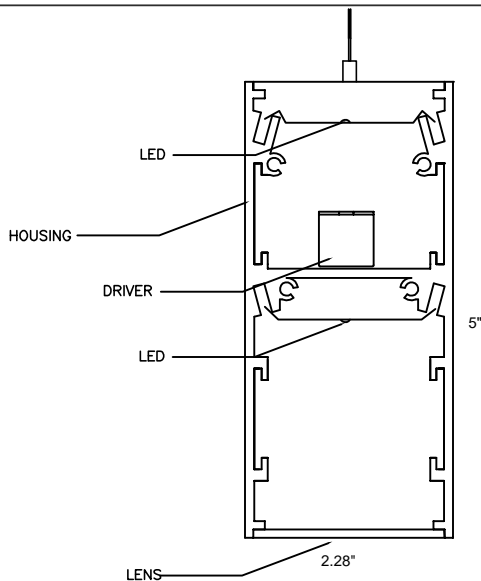

ORDERING KEY

SERIES	Lumens/ft(Watts/ft)	LENGTH	COLOR TEMP	MOUNTING	VOLTAGE	OPTIONS
NICHE 2NS LED D/ID (DIRECT/ INDIRECT)	<input type="checkbox"/> LO 1025(9.5)	<input type="checkbox"/> 2'	<input type="checkbox"/> 2700K	<input type="checkbox"/> AC - CABLE	<input type="checkbox"/> 120 V	<input type="checkbox"/> EM
	<input type="checkbox"/> MO 1220(11.5)	<input type="checkbox"/> 3'	<input type="checkbox"/> 3000K	<input type="checkbox"/> P - STEM	<input type="checkbox"/> 277 V	<input type="checkbox"/> DIM 0-10
	<input type="checkbox"/> HO 1586(14.5)	<input type="checkbox"/> 4'	<input type="checkbox"/> 3500K	<input type="checkbox"/> WM - WALL	<input type="checkbox"/> UNIVERSAL	<input type="checkbox"/> DALI
		<input type="checkbox"/> 6'	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24"		<input type="checkbox"/> LDE1 - Eco1%
		<input type="checkbox"/> 8'	<input type="checkbox"/> 5000K	<input type="checkbox"/> 48"		<input type="checkbox"/> L3DA-3Wire or Eco1%
		<input type="checkbox"/> ROWS		<input type="checkbox"/> OTHER _____		<input type="checkbox"/> SENSOR(DS,OCC,VAC)
						<input type="checkbox"/> REMOTE DRIVER

LUMENS WILL VARY
DEPENDING ON DIFFUSER
AND LED COLOR TEMP.

NATIONAL 3E LED SERIES USES ENGINE/STICK ORIGINAL EQUIPMENT (BY OSRAM, PHILIPS, SAMSUNG, ET AL) WHICH ARE RATED FOR APPROXIMATELY 100 LM/WT. ARCHITECTURAL LENSES PROVIDED WITH THE LUMINAIRES BY DESIGN EVEN THE BRIGHTNESS AND VISUAL COMFORT AND MIGHT FRACTIONALLY LOWER LM/WT.

TYPE: _____

PROJECT: _____


EVEN AND VISUALLY
COMFORTABLE LED
LIGHT DISTRIBUTION
ACROSS PROFILE OF
THE PRODUCT

50% ENERGY
SAVINGS COMPARED
TO LINEAR
FLUORESCENT

SUSTAINABLE
MATERIALS

ARRAY OF LUMEN
OPTIONS ALL
LM79/LM80 UL
APPROVED

5 YEAR WARRANTY
LED AND DRIVER



522 CORTLANDT ST.
BELLEVILLE, NJ 07109


NJ 973-751-1600
NY 212-751-1600
FAX 973-751-4931
WWW.NATLTG.COM

Modules and drivers are UL recognized components and RoHS compliant.
LED modules also comply with IENSA LM-79 and LM-80 standards.




PHOTOMETRIC REPORT


2NS D/ID-LO

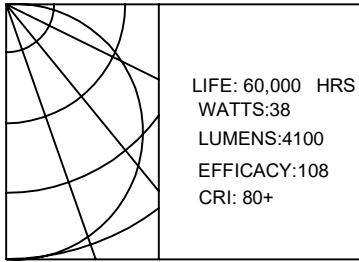

2NS D/ID-MO

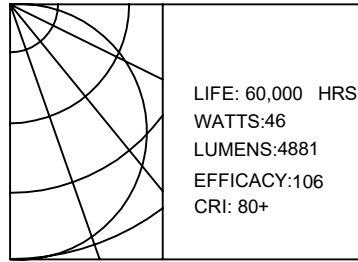


2NS D/ID-HO

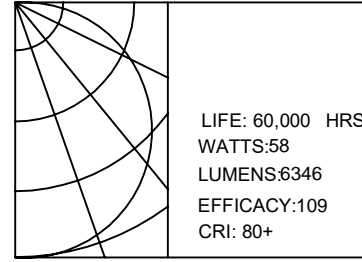

All values are based on 4' Section.


INSTALLATION INSTRUCTIONS

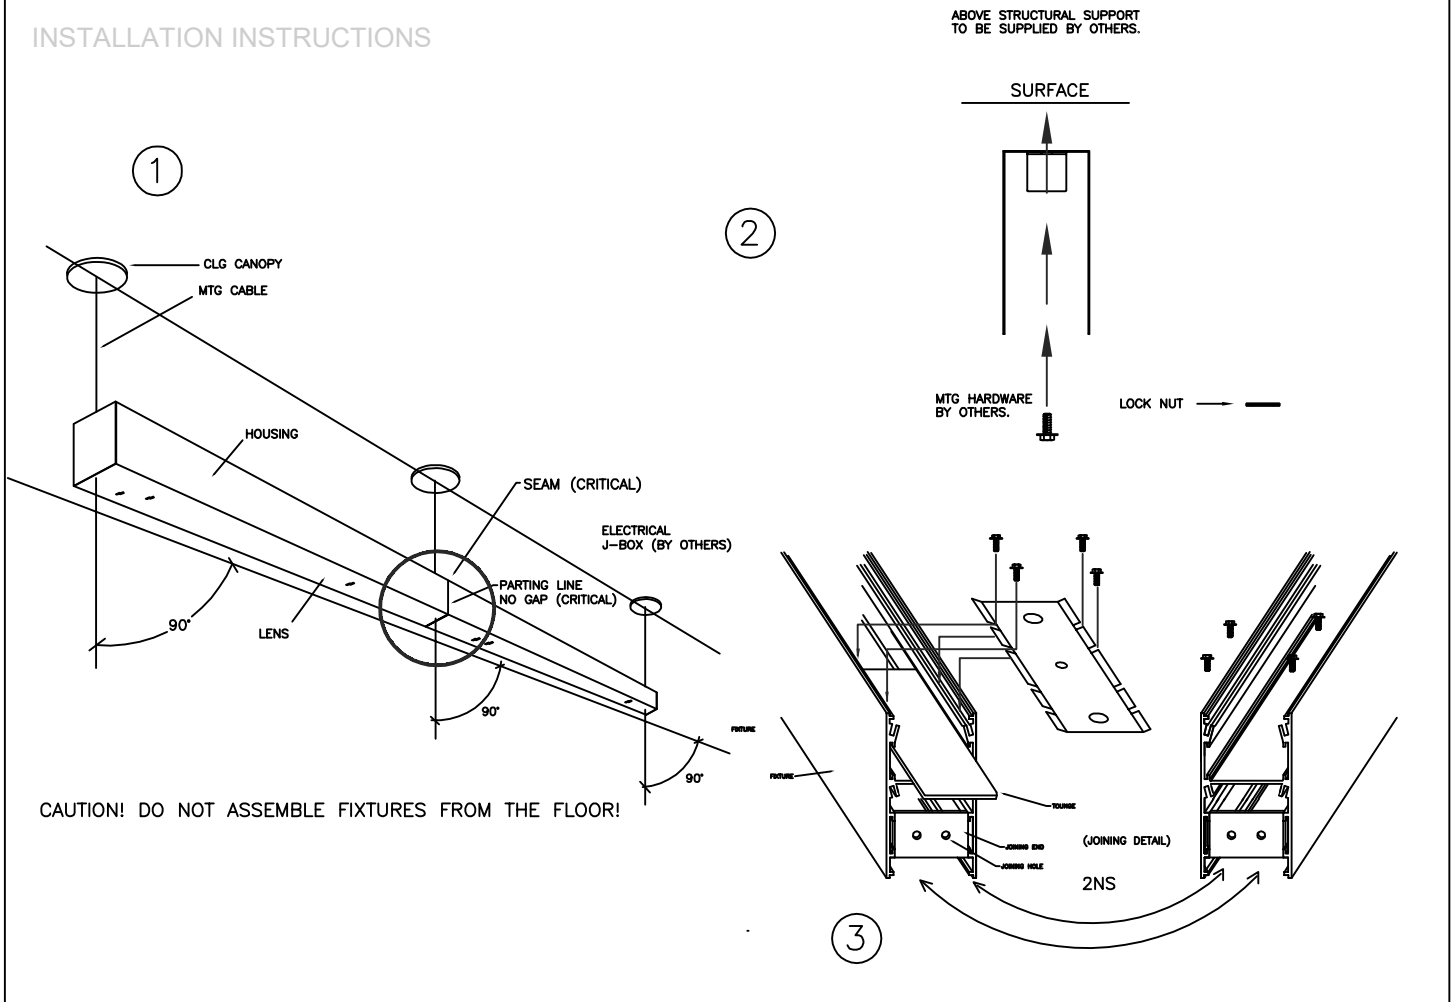

LIGHTING CONTROL SOLUTIONS

- DIMMING (0-10V, DALI Or Lutron)**
 - 0-10V Dimming Driver used as standard.
 - Continuous Dimming up to 10%.
 - Dimming wires not provided unless specified
 - Contact National for Dali or Lutron Control system
- Occ/Day-Light /Vacancy/Motion**
 - Sensor-ready and compatible drivers provided.
 - Sensors can be field installed or could be installed in the fixtures
 - Bi-level dimming and Motion sensors also available
- Compatibility:**
National fixtures are compatible with Lutron, Philips Easysense, Magnum, Wattstopper, Hubbell , Leviton , Hytronik , Daintree & Enlighted Control System

APPLICATION PICTURE

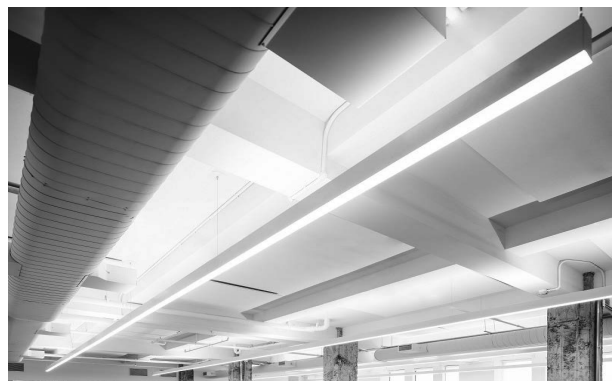

NATIONAL
LIGHTING

NATIONAL LIGHTING
COMPANY, INC.
522 CORTLANDT ST.
BELLEVILLE, NJ 07109

NJ 973-751-1600
NY 212-751-1600
FAX 973-751-4931
WWW.NATLTG.COM

JOB NAME:
CATALOG:
TYPE: