




NICHE MINI GLOW DIRECT

BY NATIONAL LIGHTING

DATE

TYPE

PROJECT

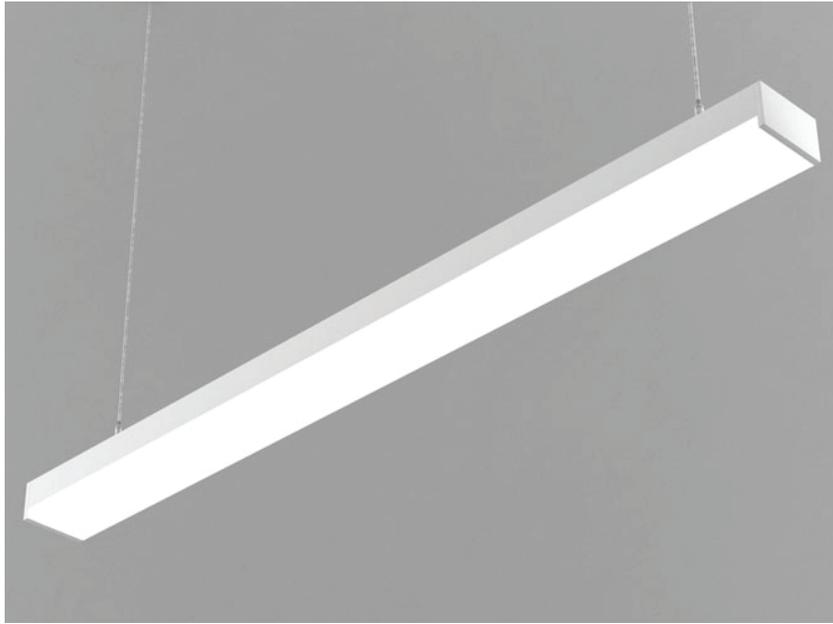


COMMENTS

DESCRIPTION

Companies, in all sectors, are demanding design elements that compliment open floor plans and open ceilings. The MINI GLOW series is ideal for indirect applications such as open offices and communal areas. The MINI GLOW, with its slick design, is the perfect architectural and mechanical complement to these spaces. With its distinctive GLOW lens, the MINI GLOW produces one of a kind lighting experiences. The MINI GLOW can be run in straight lines, right angles, rectangles and a myriad of other shapes. The LED light source works seamlessly with the natural, uncluttered work environments of today.

CROSS SECTION

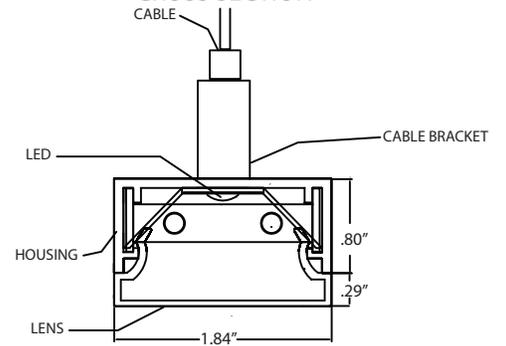

1. HOUSING

To be formed from 20GA Aluminum
 Finish: Baked white enamel (standard)
 Direct / Indirect Lighting (standard)
 All fixtures pre-wired
 All steel parts are phosphate treated for corrosion resistance before painting procedure and then baked with superior adhesion for durability

2. DRIVER

0-10V Dimming with a range of 10% - 100% (integral)
 Voltage: 120/277 VOLTS (universal) 50/60HZ
 CBM / ETL Certified CLASS 2 - Dual circuited
 UL/ETL Recognized components, ROHS Compliant with integral occ sensor

3. LED ARRAY

Mid power FR4 LED LM80 Tested
 (Factory installed) LED imaging not visible
 Flicker free (standard)


4. REFLECTOR

To be formed from 20GA Aluminum
 Finish: White (standard)

5. DIFFUSER

.125" frosted acylic dropped lens

LIGHT DISTRIBUTION

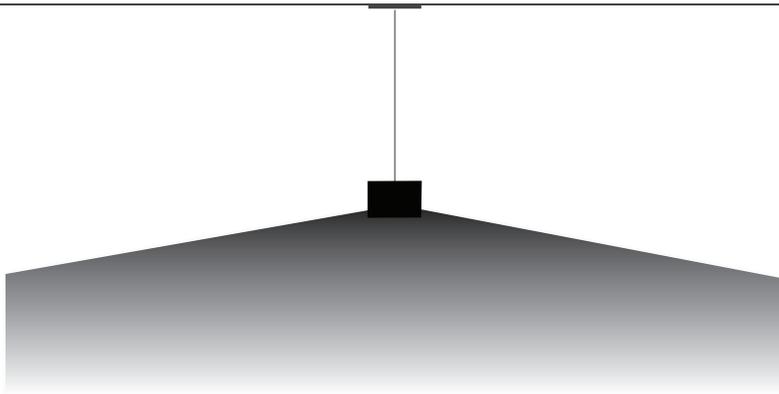

CERTIFICATIONS / TERMS



ETL LISTED



5 YEAR WARRANTY *



BUY AMERICAN ACT *



ALL COMPONENTS SERVICEABLE *

ORDERING

SERIES	LENGTH*	OUTPUT*	D	VOLTAGE	CCT	CRI - R9	COLOR*	MOUNTING	OPTIONS
MINI-GLOW-D			D	UNV					
	XXX FT 1" INCREMENTS STARTING AT 2' EX: 2' = 002	14W 1400 LM/FT 12W 1200 LM/FT 10W 1000 LM/FT 9W 900 LM/FT 7W 700 LM/FT		UNV 120-277 Volt	27 2700K 30 3000K 35 3500K 40 4000K 50 5 000K TW TUNABLE WHITE RGB COLOR TUNING	80+ 80 CRI R9 40 90+ 90 CRI R9 50	W WHITE B BLACK S SILVER *C CUSTOM PROVIDE RAL	AC AIRCRAFT CABLE P STEM MOUNT SM SURFACE MOUNT	SD DIM 0-10V S1 DIM TO 1% 0-10V L2 LUTRON 2-WIRE 1% DIM L3 LUTRON 3-WIRE 1% DIM DA DALI OC OCCUPANCY SENSOR EN ENLIGHTED (INTEGRAL OR REMOTE) EM EMERGENCY PACK

* 5 YEAR PERFORMANCE BASED WARRANTY CONSULT FACTORY FOR DETAILS

* BUY AMERICA ACT COMPLIANT (2009 STANDARDS)

* ALL INTERNAL PARTS ARE ACCESSIBLE / SERVICEABLE (DRIVERS / LED BOARDS / QUICK CONNECTS)

* ALL LUMEN OUTPUT / WATTAGES ARE NOMINAL

* ALL LENGTHS ARE NOMINAL

* OTHER FINISHES AVAILABLE - CONTACT FACTORY