



DATE

TYPE



PROJECT

COMMENTS

DESCRIPTION

Companies, in all sectors, are demanding design elements that compliment open floor plans and open ceilings. The Staccato series is ideal for applications such as open offices and communal areas. The Staccato, with its acoustically friendly fascia, is the perfect architectural and mechanical complement to these spaces. The Staccato produces one of a kind lighting experiences. The Staccato can be ran in straight lines, right angles, rectangles and a myriad of other shapes. The LED light source works seamlessly in the natural, uncluttered work environments of today. Additional acoustic panels can be specified along with the Staccato to form robust ceiling systems with integrated light sources.

LIGHT DISTRIBUTION

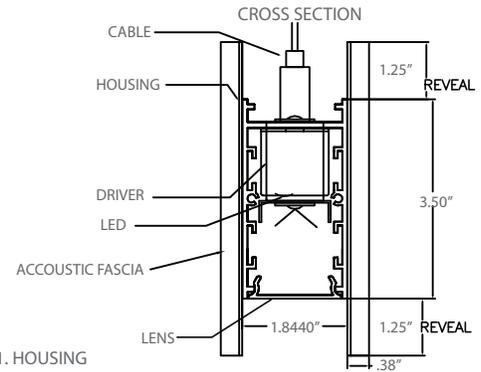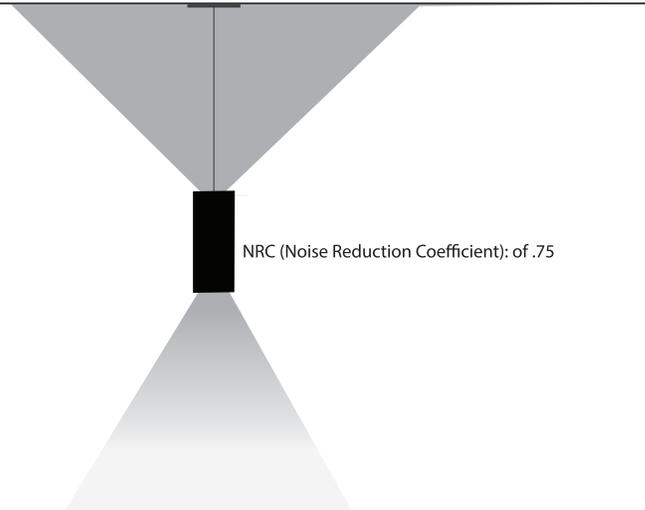

1. HOUSING

To be formed from 20GA Aluminum
 Finish: Baked white enamel (standard)
 Direct / Indirect Lighting (standard)
 All fixtures pre-wired
 All steel parts are phosphate treated for corrosion resistance before painting procedure and then baked with superior adhesion for durability

2. DRIVER

0-10V Dimming with a range of 10% - 100% (integral)
 Voltage: 120/277 VOLTS (universal) 50/60HZ
 CBM / ETL Certified CLASS 2 - Dual circuited
 UL/ETL Recognized components, ROHS Compliant with integral occ sensor

3. LED ARRAY

Mid power FR4 LED LM80 Tested
 (Factory installed) LED imaging not visible
 Flicker free (standard)

4. REFLECTOR

To be formed from 20GA Aluminum
 Finish: White (standard)

5. DIFFUSER

.125" frosted acylic dropped lens

CERTIFICATIONS / TERMS



ETL LISTED

5 YEAR WARRANTY *

BUY AMERICAN ACT *

ALL COMPONENTS SERVICEABLE *

ORDERING

| SERIES | LENGTH* | OUTPUT* | RATIO D/D | VOLTAGE | CCT | CRI - R9 | COLOR* | MOUNTING | OPTIONS | FINISH |
|--------------|---|----------------|-----------|------------------|------------------|------------------|-----------------------|-------------------|-----------------------------------|-------------------|
| STACCATO 1NS | | | | UNV | | | | | | |
| | XXX FT 1" INCREMENTS STARTING AT 2' EX: 2' = 002 | 14W 1320 LM/FT | 10 100/00 | UNV 120-277 Volt | 27 2700K | 80+ 80 CRI R9 40 | W WHITE | AC AIRCRAFT CABLE | SD DIM 0-10V | SC SINGLE CIRCUIT |
| | | 12W 1135 LM/FT | 75 75/25 | | 30 3000K | 90+ 90 CRI R9 50 | B BLACK | P STEM MOUNT | S1 DIM TO 1% 0-10V | DC DUAL CIRCUIT |
| | | 10W 945 LM/FT | 64 60/40 | | 35 3500K | | S SILVER | WM WALL MOUNT | L2 LUTRON 2-WIRE 1% DIM | |
| | | 9W 850 LM/FT | 55 50/50 | | 40 4000K | | *C CUSTOM PROVIDE RAL | | L3 LUTRON 3-WIRE 1% DIM | |
| | | 7W 660 LM/FT | 46 40/60 | | 50 5000K | | | | DA DALI | |
| | | | 27 25/75 | | TW TUNABLE WHITE | | | | OC OCCUPANCY SENSOR | |
| | | | 01 00/100 | | RGB COLOR TUNING | | | | EN ENLIGHTED (INTEGRAL OR REMOTE) | |
| | | | | | | | | | EM EMERGENCY PACK | |

* 5 YEAR PERFORMANCE BASED WARRANTY CONSULT FACTORY FOR DETAILS

* BUY AMERICA ACT COMPLIANT (2009 STANDARDS)

* ALL INTERNAL PARTS ARE ACCESSABLE / SERVICEABLE (DRIVERS / LED BOARDS / QUICK CONNECTS)

* ALL LUMEN OUTPUT / WATTAGES ARE NOMINAL

* ALL LENGTHS ARE NOMINAL

* OTHER FINISHES AVAILABLE - CONTACT FACTORY