



DATE

TYPE


PROJECT

COMMENTS


DESCRIPTION

Companies, in all sectors, are demanding design elements that compliment open floor plans and open ceilings. The Staccato series is ideal for applications such as open offices and communal areas. The Staccato, with its acoustically friendly fascia, is the perfect architectural and mechanical complement to these spaces. The Staccato produces one of a kind lighting experiences. The Staccato can be ran in straight lines, right angles, rectangles and a myriad of other shapes. The LED light source works seamlessly in the natural, uncluttered work environments of today. Additional acoustic panels can be specified along with the Staccato to form robust ceiling systems with integrated light sources.

LIGHT DISTRIBUTION

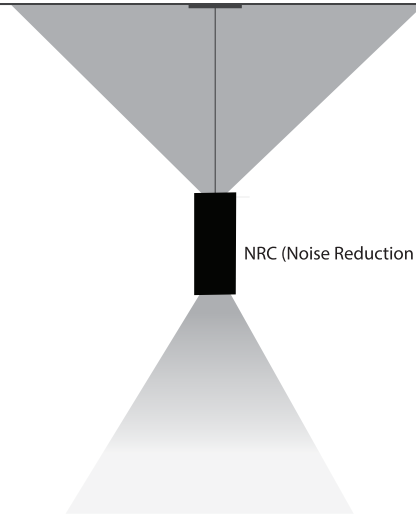

NRC (Noise Reduction Coefficient): of .75

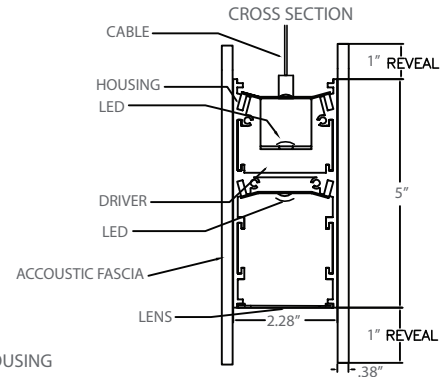

1. HOUSING

To be formed from 20GA Aluminum  
 Finish: Baked white enamel (standard)  
 Direct / Indirect Lighting (standard)  
 All fixtures pre-wired  
 All steel parts are phosphate treated for corrosion resistance before painting procedure and then baked with superior adhesion for durability

2. DRIVER

0-10V Dimming with a range of 10% - 100% (integral)  
 Voltage: 120/277 VOLTS (universal) 50/60HZ  
 CBM / ETL Certified CLASS 2 - Dual circuited  
 UL/ETL Recognized components, ROHS Compliant with integral occ sensor

3. LED ARRAY

Mid power FR4 LED LM80 Tested  
 (Factory installed) LED imaging not visible  
 Flicker free (standard)

4. REFLECTOR

To be formed from 20GA Aluminum  
 Finish: White (standard)

5. DIFFUSER

.125" frosted acrylic dropped lens

CERTIFICATIONS / TERMS



ETL LISTED

5 YEAR WARRANTY \*

BUY AMERICAN ACT \*

ALL COMPONENTS SERVICEABLE \*

ORDERING

SERIES	LENGTH*	OUTPUT*	RATIO D/D	VOLTAGE	CCT	CRI - R9	COLOR*	MOUNTING	OPTIONS	FINISH
STACCATO 2NS EC				UNV						
	XXX FT 1" INCREMENTS STARTING AT 2' EX: 2' = 002	14W 1320 LM/FT	10 100/00	UNV 120-277 Volt	27 2700K	80+ 80 CRI R9 40	W WHITE	AC AIRCRAFT CABLE	SD DIM 0-10V	SC SINGLE CIRCUIT
		12W 1135 LM/FT	75 75/25		30 3000K	90+ 90 CRI R9 50	B BLACK	P STEM MOUNT	S1 DIM TO 1% 0-10V	DC DUAL CIRCUIT
		10W 945 LM/FT	64 60/40		35 3500K		S SILVER	WM WALL MOUNT	L2 LUTRON 2-WIRE 1% DIM	
		9W 850 LM/FT	55 50/50		40 4000K		*C CUSTOM PROVIDE RAL		L3 LUTRON 3-WIRE 1% DIM	
		7W 660 LM/FT	46 40/60		50 5000K				DA DALI	
			27 25/75		TW TUNABLE WHITE				OC OCCUPANCY SENSOR	
			01 00/100		RGB COLOR TUNING				EN ENLIGHTED (INTEGRAL OR REMOTE)	
									EM EMERGENCY PACK	

\* 5 YEAR PERFORMANCE BASED WARRANTY CONSULT FACTORY FOR DETAILS

\* BUY AMERICA ACT COMPLIANT (2009 STANDARDS)

\* ALL INTERNAL PARTS ARE ACCESSABLE / SERVICEABLE (DRIVERS / LED BOARDS / QUICK CONNECTS)

\* ALL LUMEN OUTPUT / WATTAGES ARE NOMINAL

\* ALL LENGTHS ARE NOMINAL

\* OTHER FINISHES AVAILABLE - CONTACT FACTORY