

DATE


TYPE

PROJECT

COMMENTS

## DESCRIPTION

Companies, in all sectors, are demanding design elements that compliment open floor plans and open ceilings. The Staccato series is ideal for applications such as open offices and communal areas. The Staccato, with its acoustically friendly fascia, is the perfect architectural and mechanical complement to these spaces. The Staccato produces one of a kind lighting experiences. The Staccato can be ran in straight lines, right angles, rectangles and a myriad of other shapes. The LED light source works seamlessly in the natural, uncluttered work environments of today. Additional acoustic panels can be specified along with the Staccato to form robust ceiling systems with integrated light sources.

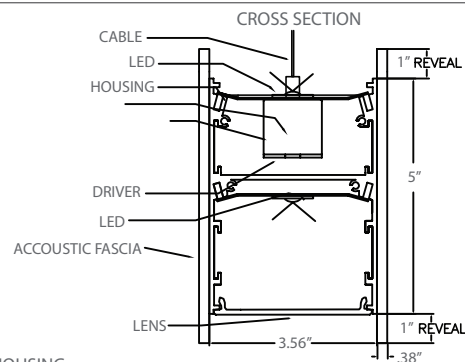

### 1. HOUSING

To be formed from 20GA Aluminum  
Finish: Baked white enamel (standard)  
Direct / Indirect Lighting (standard)  
All fixtures pre-wired  
All steel parts are phosphate treated for corrosion resistance before painting procedure and then baked with superior adhesion for durability

### 2. DRIVER

0-10V Dimming with a range of 10% - 100% (integral)  
Voltage: 120/277 VOLTS (universal) 50/60HZ  
CBM / ETL Certified CLASS 2 - Dual circuited  
UL/ETL Recognized components, ROHS Compliant with integral occ sensor

### 3. LED ARRAY

Mid power FR4 LED LM80 Tested  
(Factory installed) LED imaging not visible  
Flicker free (standard)

### 4. REFLECTOR

To be formed from 20GA Aluminum  
Finish: White (standard)

### 5. DIFFUSER

.125" frosted acrylic dropped lens

## ORDERING

## LIGHT DISTRIBUTION

NRC (Noise Reduction Coefficient): of .75

## CERTIFICATIONS / TERMS



ETL LISTED



5 YEAR WARRANTY \*



BUY AMERICAN ACT \*



ALL COMPONENTS SERVICEABLE \*

SERIES	LENGTH*	OUTPUT*	RATIO D/D	VOLTAGE	CCT	CRI - R9	COLOR*	MOUNTING	OPTIONS	FINISH
STACCATO 4NS EC				UNV						
	XXX FT 1" INCREMENTS STARTING AT 2' EX: 2' = 002	14W 1320 LM/FT 12W 1135 LM/FT 10W 945 LM/FT 9W 850 LM/FT 7W 660 LM/FT	10 100/00 75 75/25 64 60/40 55 50/50 46 40/60 27 25/75 01 00/100	UNV 120-277 Volt	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K TW TUNABLE WHITE RGB COLOR TUNING	80+ 80 CRI R9 40 90+ 90 CRI R9 50	W WHITE B BLACK S SILVER *C CUSTOM PROVIDE RAL	AC AIRCRAFT CABLE P STEM MOUNT WM WALL MOUNT	SD DIM 0-10V S1 DIM TO 1% 0-10V L2 LUTRON 2-WIRE 1% DIM L3 LUTRON 3-WIRE 1% DIM DA DALI OC OCCUPANCY SENSOR EN ENLIGHTED (INTEGRAL OR REMOTE) EM EMERGENCY PACK	SC SINGLE CIRCUIT DC DUAL CIRCUIT

\* 5 YEAR PERFORMANCE BASED WARRANTY CONSULT FACTORY FOR DETAILS

\* BUY AMERICA ACT COMPLIANT (2009 STANDARDS)

\* ALL INTERNAL PARTS ARE ACCESSABLE / SERVICEABLE (DRIVERS / LED BOARDS / QUICK CONNECTS)

\* ALL LUMEN OUTPUT / WATTAGES ARE NOMINAL

\* ALL LENGTHS ARE NOMINAL

\* OTHER FINISHES AVAILABLE - CONTACT FACTORY